

**ADDENDUM NO. 5
TO
CONTRACT DOCUMENTS AND SPECIFICATIONS
FOR
ORANGE COUNTY – EUBANKS WASTE & RECYCLING FACILITY
IMPROVEMENTS
ISSUED FOR BID – DECEMBER 2015**

ISSUED: January 28, 2016

TO: All Official Plan Holders

The following revisions, additions, and clarifications are hereby made part of the Contract Documents and Specifications for the above-referenced project and shall be taken into account in the preparation of all Bids and the execution of all Work. All items in conflict with the Addenda are hereby deleted. This addendum is made part of the Contract Documents and shall be noted on the proposal.

I. SPECIFICATIONS

Ad-5-1. Section 00301, Bid Form, Part 7:

- (1) Unit Cost Item No. 4, **ADD** the following to the end of the last sentence “ based on Detail 4, Sheet 00C-11 Site Details-1.”
- (2) Unit Cost Item No. 10, **ADD** the following sentence: “Unit price based per tree with a maximum tree size of 3-inch caliper.”

II. DRAWINGS

Ad-5-2. Drawing 00C-04, Detailed Grading Plan: **ADD** “Note 6. See Section D, Sheet 00S-05 for concrete details for five (5) central concrete compactor pads.”

Ad-5-3. Drawing 00S-04, Structural Plan:

- (1) Key Note 15: **REPLACE** “00S-04” **WITH** “00S-05”
- (2) Key Note 16: **REPLACE** in its entirety with “New concrete slab for storage shed. See Section “D” on 00S-05 for concrete details. 16'-0" x 20'-0".”
- (3) Key Note 17: **REPLACE** in its entirety with “New concrete slab for equipment shed and processing area. See Section “D” on 00S-05 for concrete details. 12'-0" x 20'-0" and 24'-0" x 48'-0".”


III. CLARIFICATIONS

Ad-5-4. Payment for the removal of rock, if encountered or required, will be made based on the unit costs provided by the Bidder. The unit cost schedule is contained in Section 00301, Part 7.

- Ad-5-5. Bidder is to include in the Base Bid, the undercut and backfill of unsuitable soils in the amount of 10,000 cubic yards. Adjustments over or under the 10,000 cubic yard amount will be made based on the unit costs provided by Bidder in the Unit Cost Schedule contained Section 00301, Part 7.
- Ad-5-6. All soil borrow and or unsuitable soil material will be obtained from or disposed to areas on the Eubanks Road facility property as directed by the Owner.
- Ad-5-7. Truck scales, foundation and approach slabs are not part of this bid and will be included in a separate contract.
- Ad-5-8. During the pre-bid conference, the Owner discussed 6,000 tons of structural material that may be available for this project. Bidder should assume that this material will not be available for this project.
- Ad-5-9. All electrical work as shown on the drawings and specifications is to be included in this contract.
- Ad-5-10. The Contractor will be responsible for providing the wiring and conduits to the secondary side of the utility transformer. While a proposed route is shown on Drawing 00E-02, the Contractor will need to coordinate routing of the secondary wire and conduit with the utility provider prior to installation.

Respectfully submitted,

HDR Engineering, Inc. of the Carolinas

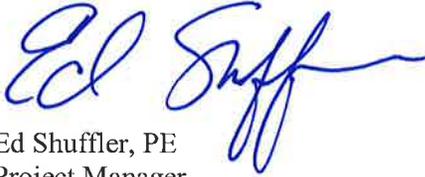

Ed Shuffler, PE
Project Manager

Attachments: None.

